



BERITECH

Solutions Driven by People.




BE 3116 | Continuous Cooker Double

- High capacity.
- Easily integrated into existing production lines.
- Includes an intelligent control system.
- Easy to clean, nothing to dismount before cleaning.
- Made of acid resistant steel.
- Few moving parts – low maintenance cost.

Continuous Cooker Double.

Machine

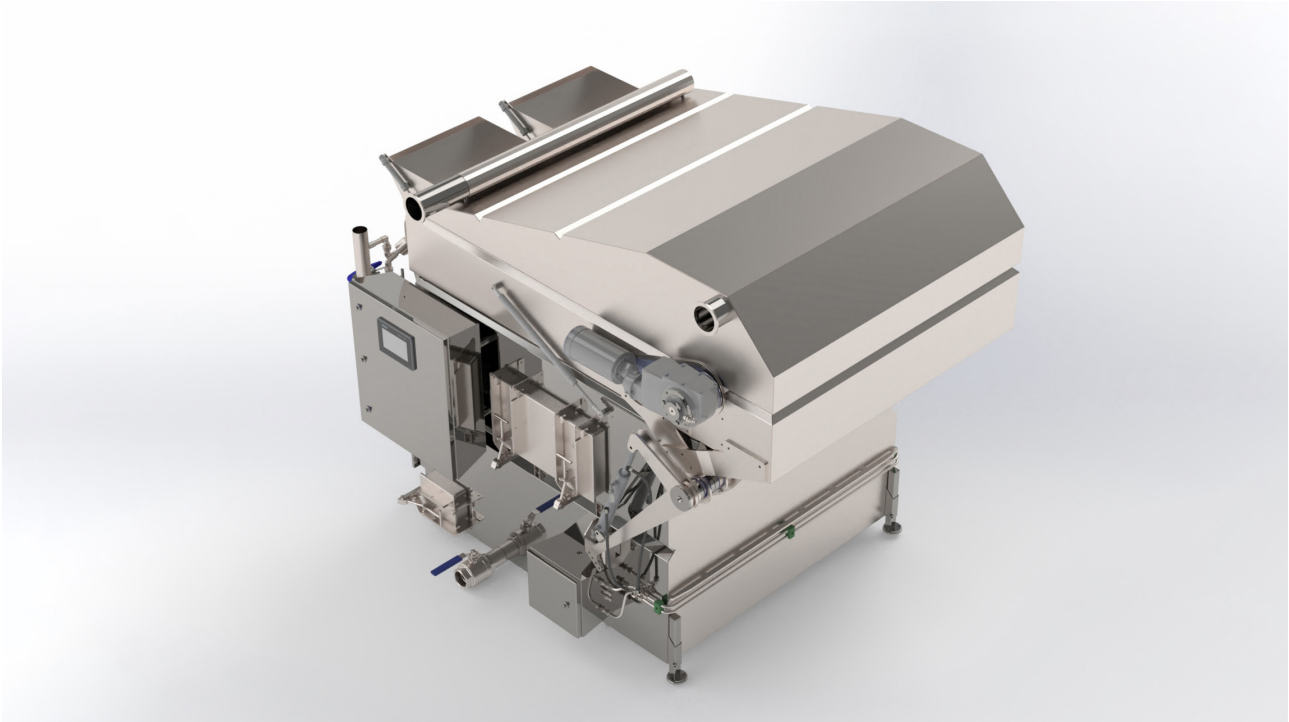

	BE 3116.40	BE 3116.43	BE 3116.50	BE 3116.53
Dimensions LxWxH	2550 x 1500 x 1720 mm	2550 x 1500 x 1720 mm	2550 x 1900 x 1720 mm	2550 x 1900 x 1720 mm
Capacities Capacity stated is for Pandalus shell-on. Cooking time at 3.5 min. Please contact Beritech concerning other species.	2 x 600 kg/h	2 x 600 kg/h	2 x 900 kg/h	2 x 900 kg/h
Heating	Gas Oil	Steam	Gas Oil	Steam
Consumption	20 kg/h	300 kg/h	30 kg/h	450 kg/h
Power 3x440V, 60 c/s	2.2 kW/13A	2.2 kW/13A	2.2 kW/13A	2.2 kW/13A
Water Consumption (depends on products)	1.5 m ³ /h	1.5 m ³ /h	2.0 m ³ /h	2.0 m ³ /h
Weight Approx.	1000 kg	1000 kg	1200 kg	1200 kg