



BERITECH

Solutions Driven by People.




BE 3116 | Continuous Cooker Single. Electric

- High capacity.
- Easily integrated in existing production lines.
- Includes an intelligent control system.
- Easy to clean, nothing to dismount before cleaning.
- Made of acid resistant steel.
- Few moving parts – low maintenance cost.

Continuous Cooker Single. Electric.

Machine

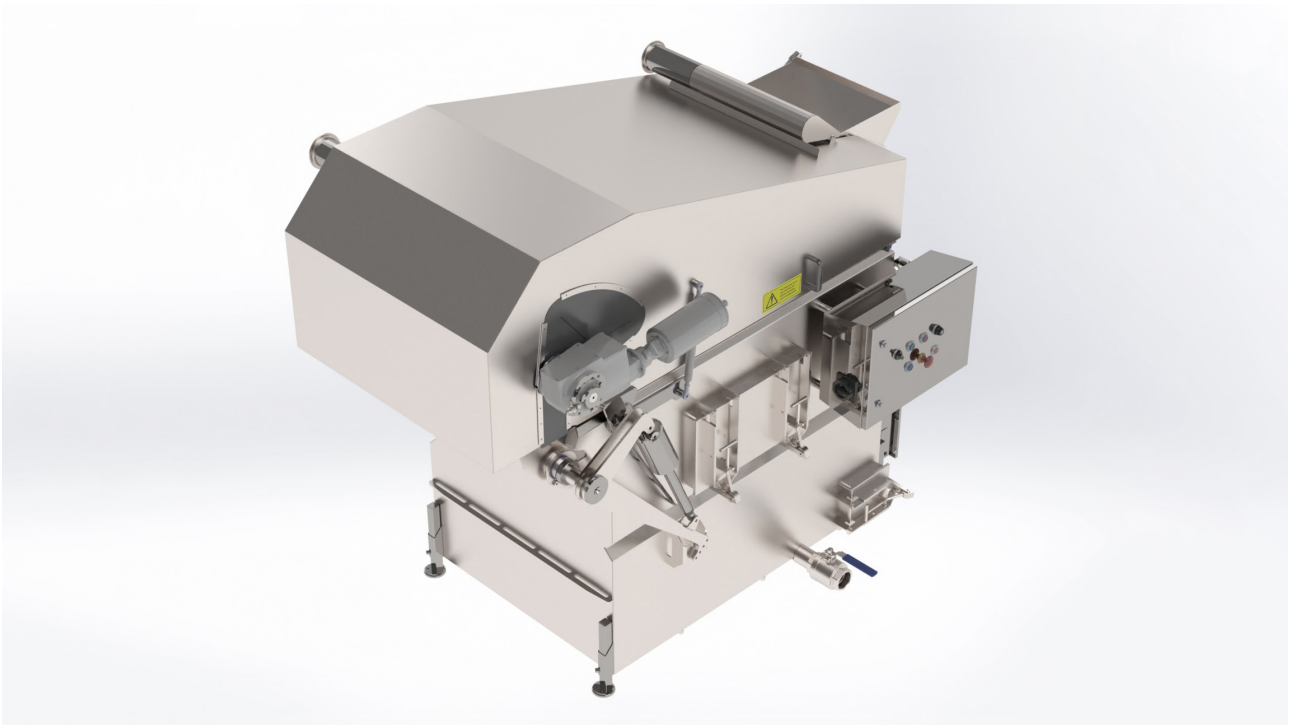

Model	BE 3116.14	BE 3116.24
Dimensions LxWxH	2550 x 1500 x 1720 mm	2550 x 1900 x 1720 mm
Capacities Capacity stated is for Pandalus shell-on. Cooking time at 3.5 min.	1200 kg/h	1800 kg/h
Heating	Electric	Electric
Power Consumption (Start-up)	180 kW/240 A	270 kW/360 A
Power Consumption (Running)	127 kW/240 A	189 kW/360 A
Pre-heating time	53 min	47 min
Power 3x440V, 60 c/s	2.2 kW/13A	2.2 kW/13A
Water Consumption (depends on products)	1.5 m ³ /h	2.0 m ³ /h
Weight Approx.	1200 kg	1300 kg